

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
9 October 2003 (09.10.2003)


PCT

(10) International Publication Number  
**WO 03/082049 A1**

- (51) International Patent Classification<sup>7</sup>: A46B 13/02, A61C 17/26
- (21) International Application Number: PCT/US03/09116
- (22) International Filing Date: 25 March 2003 (25.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
10/107,092 26 March 2002 (26.03.2002) US
- (71) Applicant: COLGATE-PALMOLIVE COMPANY  
[US/US]; 300 Park Avenue, New York, NY 10022 (US).
- (72) Inventors: GATZEMEYER, John, J.; 85 Rohill Road,  
Hillsborough, NJ 08844 (US). MINTEL, Thomas; 439  
Central Avenue, Rahway, NJ 07065 (US).
- (74) Agent: GOLDFINE, Henry, S.; Colgate-Palmolive  
Company, 909 River Road, P.O. Box 1343, Piscataway, NJ  
08855-1343 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,  
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ,  
VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: POWERED TOOTHBRUSH WITH ROTATING SECTIONS

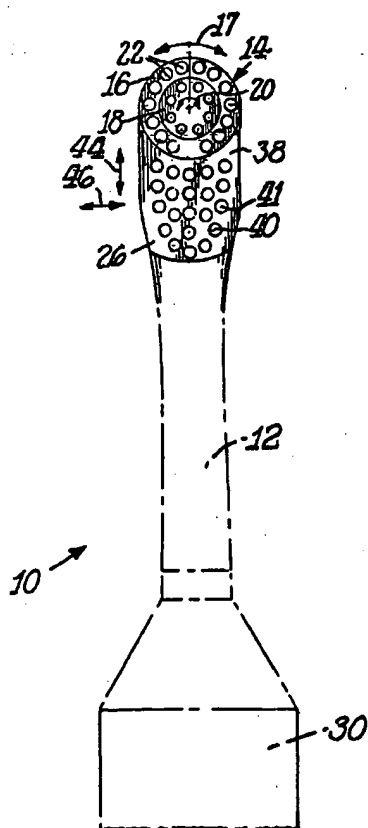

(57) Abstract: The head of a toothbrush includes a first tuft block having bristles and a second tuft block having bristles. The first and second tuft blocks are mounted for counter-rotational or counter-rotational oscillating movement in a direction parallel to the outer surface of the head. The toothbrush head also includes a third section having bristles extending outwardly from the head to provide an extended field of bristles to support an elongated ribbon of toothpaste and for enhanced cleaning.

WO 03/082049 A1



**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*

**POWERED TOOTHBRUSH WITH ROTATING SECTIONS****FIELD OF THE INVENTION**

The present invention relates to toothbrushes which include rotating sections in the head.

**BACKGROUND OF THE INVENTION**

5           The present invention is directed to a powered toothbrush and in particular to a toothbrush head having movably mounted bristles. Various types of powered toothbrushes are generally known in the art. Reference is made to U.S. Patent No. 5,625,916 which relates to an electri-  
10           cally driven toothbrush having a motor drive for rotating a drive shaft. The drive shaft is connected to a bristle holder on the head of the toothbrush in such a manner that rotation of the drive shaft causes the bristle holder to rotationally oscillate back and forth. Various other ar-  
15           rangements are known for oscillating a bristle holder mounted to the head of an electric toothbrush.

          U.S. Patent No. 5,416,942 shows a further type of powered toothbrush wherein the head includes a pair of concentrically arranged sections, each of which is driven  
20           in a rotational oscillating manner in opposite directions. The toothbrush head, however, includes only the two counter-oscillating sections. The head does not include any other sections on which bristles may be mounted.

IR-6882 (144\*201)

U.S. Patent No. 6,032,313 discloses a household appliance which would be used for cleaning, polishing or massaging. One such appliance is a toothbrush. The head has a plurality of co-axially rotatable or parallel linearly movable sections. No provision is made on the head for other bristle containing sections.

U.S. Patent No. 5,070,567 discloses an electrically driven toothbrush which includes a rotatable brush head having bristles thereon. Adjacent to the brush head are a further group of bristles each of which rotates around its own axis.

U.S. Patent No. 1,796,641 relates to a spotting brush usable for dry-cleaning wherein a pair of side by side heads are rotatably mounted.

#### SUMMARY OF THE INVENTION

An object of this invention is to provide a powered toothbrush which includes counter-rotational or oscillating sections and a further section having bristles to deliver a cleaning, polishing, whitening action in addition to enhancing the cleaning efficiency of a typical powered toothbrush.

In accordance with this invention the toothbrush head includes a first section or tuft block which is mounted for oscillating back and forth in a rotational direction parallel to the outer surface of the toothbrush

IR-6882 (144\*201)

head. A second section or tuft block is mounted for oscillating back and forth in a rotational direction also parallel to the toothbrush head, but in counter-oscillation to the direction of the first tuft block. A  
5 third section or tuft block is provided on the toothbrush head and also contains bristles.

In various practices of the invention the third section could be a fixed non-moving section wherein the bristles are also fixed. Alternatively, the bristles on  
10 the fixed section could be mounted movably in an elastomer material on the section to permit independent movement of such bristles, although the fixed section remains stationary.

In other practices of the invention the third  
15 section could be a movable section which oscillates back and forth in a direction parallel to the longitudinal axis of the toothbrush head or in a direction transverse to the longitudinal axis of the toothbrush head. In yet another alternative practice of the invention the third section  
20 could oscillate in and out in a direction perpendicular to the outer surface of the toothbrush head to form a vibrating section which vibrating section may or may not simultaneously oscillate back and forth.

In a preferred practice of the invention the  
25 second tuft head is mounted within and concentric to the

IR-6882 (144\*201)

first tuft block. The bristles of the first tuft block may extend outwardly from the outer surface of the head a greater distance than the bristles of the second tuft head so as to create a cup-like shape which would facilitate retaining the toothpaste on the first and second tuft heads.

The third section is preferably mounted longitudinally in line with the first and second sections so that the portion of the head containing the bristles of the first, second and third sections is of an elongated shape which would also facilitate holding an elongated ribbon of toothpaste on the bristles.

#### THE DRAWINGS

Figure 1 is a perspective view of a toothbrush head in accordance with this invention;

Figure 2 is a front elevational view of the head shown in Figure 1;

Figure 3 is a side elevational view of the head shown in Figures 1-2; and

Figure 4 is a top plan view of the head shown in Figures 1-3.

#### DETAILED DESCRIPTION

Figures 1-4 illustrate one practice of this invention wherein a toothbrush 10 includes a neck section 12 of a handle 30, which is partially shown, and includes a

IR-6882 (144\*201)

head 14. The head 14 may be a replaceable, i.e. a refill head or the head 14 may be permanently attached to the handle 30 within the practice of this invention.

5 As illustrated, particularly in Figure 2, the head 14 includes a first tuft block 16 which is illustrated as being at the outermost or distal portion of head 14. Tuft block 16 is preferably a disk of circular ring type shape having an open inner area. Tuft block 16 is intended to oscillate in a rotational manner as indicated  
10 by the arrow 17. If desired, other shapes may be used such as an egg shape or an oval or various regular or irregular shapes, as long as (in the preferred practice of the invention) there is an open area in which a second tuft block 18 may be mounted. An egg shape or circular  
15 shape of the tuft block 16 is preferred, with a circular shape being most preferred since such shape requires the least amount of clearance to accommodate the oscillating motion and to accommodate the inner second tuft block 18.

20 Tuft block 18 is preferably a disk of circular cross-section which is also intended to oscillate in a rotational manner, such as indicated by the arrow 20. Thus, first tuft block 16 and second tuft block 18 are mounted concentric with each other at the distal end of head 14.

25 First tuft block 16 includes a plurality of tufts of bristles 22. In the illustrated embodiment the

IR-6882 (144\*201)

tufts of bristles 22 are formed in a coarcuate row. Similarly, tuft block 18 is provided with a plurality of tufts of bristles 24 which may be also coarcuate with each other along a circle parallel to the arcuate row of bristles 22.

5           The two coarcuate sets of bristles 22,24 are preferred since such arrangement maximizes bristle density on the surface area of tuft blocks 16 and 18 and if the diameter dimension of the tuft block 18 is sufficient, additional tufts can be located centrally therein. In the  
10 preferred practice of the invention the outer row of bristles 22 extend outwardly from the outer surface 26 of head 14 a greater distance than the inner arcuate row of bristles 24. As a result, a cup-like structure is formed which facilitates retaining toothpaste on the bristles  
15 22,24, as shown in Figure 4. As shown in Figure 2 the outer row of bristles 22 extend generally perpendicular to the tuft block 16; however, the outer row of bristles 22 can be splayed outwardly from the tuft block 16 at an acute angle thereto.

20           Tuft blocks 16 and 18 may be oscillated by any suitable drive mechanism. Figure 3, for example, illustrates the type of drive mechanism described in U.S. Patent No. 5,146,942, all of the details of which are incorporated herein by reference thereto. As shown therein, a  
25 drive shaft 28 is rotated by a driving motor (not shown)



IR-6882 (144\*201)

in the handle 30. See Figure 2. The motor could be powered in any suitable manner such as by batteries. As shown in Figure 3, a transmission spindle 32 is operatively connected such as by a permanent or detachable connection to drive shaft 28. Spindle 32 has a V-segment oriented perpendicularly to the axis of rotation of the drive shaft 28 and eccentrically with respect to the axis of rotation. A first inclined arm 34 engages in an axial slot in first tuft block 16. A second distal arm 36 engages in an axial slot in second tuft block 18. Rotation of shaft 28 and spindle 32 results in rotation of arms 34,36. Because the eccentric portions of arms 34,36 are mounted in slots in tuft blocks 16,18 the rotational movement is transmitted to the tuft blocks as an oscillating rotational movement shown by the arrows 17 and 20 of Figure 2. As driven by the spindle 32, the rotational movement of first tuft block 16 will be opposite in direction from that of second tuft block 18.

In the preferred practice of this invention the counter-oscillating first and second tuft blocks are mounted concentric to each other as illustrated. It is to be understood, however, that the invention may also be practiced where the first and second tuft blocks are located in other manners such as being side by side in either a longitudinal or transverse direction with respect

IR-6882 (144\*201)

to the longitudinal axis of head 14 and neck 12. The concentric mounting of the tuft blocks is preferred since it would enable a more simplified drive arrangement to be used such as illustrated in Figure 3 while minimizing space requirements. The invention, however, might be practiced where, for example, the first tuft block 16 is of a full or closed circular shape rather than being of ring-like shape and is mounted longitudinally adjacent to the second tuft block 18. The counter-oscillation could still be achieved by spacing the arms 34 and 36 of the spindle 32 a greater distance from each other. Alternatively, the tuft blocks 16,18 could be side by side and could be driven by separate drive mechanisms having, for example, separate shafts. Such separate drive mechanisms could also be used where the first tuft block 16 and the second tuft block 18 are mounted concentric to each other. The separate drive arrangements is not as preferred since it would require additional components and space requirements.

A characteristic of the invention is the provision of a third tuft block 38 which is illustrated as being between the neck 12 and the counter-oscillating tuft blocks 16, 18. It is to be understood, however, that the third tuft block could be located distally of the counter-oscillating tuft blocks or laterally side by side to the

IR-6882 (144\*201)

counter-oscillating tuft blocks or between the counter-oscillating tuft blocks such as by being a separate coar-  
cuate section within inner second tuft block 18 by making  
the second tuft block 18 of ring-like shape. It is pre-  
ferred, however, that the third tuft block 38 be longitu-  
dinally outside of the counter-oscillating tuft blocks so  
as to extend the length of the surface area in head 14  
having bristles.

The provision of three tuft blocks is also ad-  
vantageous in that the powered toothbrush simulates, in  
appearance of the head, the structure of a conventional  
manual toothbrush which would make the powered or electric  
toothbrush more acceptable to users since the appearance  
simulates what a user is accustomed to seeing. In addi-  
tion, the three sections enhance the efficiency of the  
toothbrush, both as a result of the movement of the tuft  
blocks and of the ability to readily retain toothpaste.

As illustrated in Figures 1-3, third tuft block  
38 is also provided with bristles 40 which extend out-  
wardly from the outer surface 26 of third tuft block 38.  
The outer surface 26 of third tuft block 38 and the outer  
surface 26 of the inner and outer counter-oscillating tuft  
block 16,18 are preferably coplanar with each other so  
that the outer surface of the entire head is in a single  
plane. The invention, however, could be practiced wherein

IR-6882 (144\*201)

the third tuft block 38 contains alternating rows of the same height or where some or all of the rows of bristles extend outwardly a different distance than other rows of bristles to result in different stepped effects for the outer surface of the third tuft block 38.

In the illustrated embodiment as best shown in Figure 3 at least some of the bristles 40 extend outwardly from the outer surface 26 of head 14 the same distance as bristles 22 so as to create a generally flat surface for receiving the toothpaste. Some of the bristles 41, however, may also be shorter as illustrated in Figure 3.

While Figures 1-4 illustrate the bristles to be of conventional fiber form, the term "bristles" is intended to be used in a generic sense as cleaning elements or massage elements and could include, for example, elastomeric fingers or walls arranged in a circular cross-section shape or any type of desired shape, including straight portions or sinusoidal portions.

The bristles could be mounted to the tuft blocks or sections by extending through suitable openings in the tuft block so that the base of the bristles is mounted within or below the tuft block. If desired, the bristles could be embedded in an elastomeric material which would permit the bristles to have an independent motion in addition to the motion imparted by the oscillating tuft blocks

IR-6882 (144\*201)

16 and 18, instead of being fixed bristles on fixed third section 38. Such various forms of bristles may thus be used for the bristles referred to or any of the sections of the head 14.

5                   It is to be understood that the specific illustration of the bristles is merely for exemplary purposes. The invention can, however, be practiced with various combinations of the same or different bristle configurations secured to the head by known technology including such as  
10                   staple technology, in-mold tufting technology etc., and/or with the same or different bristle materials (such as nylon bristles, spiral bristles, rubber bristles, etc.) As previously mentioned, while Figures 1-4 illustrate the bristles to be generally perpendicular to the outer sur-  
15                   face of head 14, some or all of the bristles may be angled at various angles with respect to the outer surface of the bristle head. It is thereby possible to select the combination of bristle configurations, bristle materials and bristle orientations to achieve specific intended results,  
20                   such as to create as much movement from the oscillating tuft heads to deliver additional oral health benefits like enhanced cleaning, tooth polishing, tooth whitening and/or massaging of the gums.

                  It is to be understood that the invention can be  
25                   practiced by locating tufts of bristles in any otherwise

IR-6882 (144\*201)

open area of the toothbrush head. Such tufts of bristles could be fixed bristles perpendicularly mounted or mounted at an angle to the exposed outer surface 26 of the head 14 or could be bristles mounted on an elastomeric base so as to be independently movable when pressure is applied.

Such bristles in their normal condition could be either perpendicular or at an angle to the exposed outer surface of the toothbrush head.

The invention may also be practiced where different sets of bristles have different colors. Thus, for example, the arcuate row of bristles 22 could have a white color while the inner row of bristles 24 could have a blue color. The closed arcuate row of 8 bristles 40 at the portion of fixed section 38 adjacent to neck 12 and the tuft of bristles within that arcuate row could also be of a blue color while the next arcuate row of five tufts of bristles 41 could be of a white color and could be shorter than the remaining bristles on fixed section 38. The final seven tufts of bristles 40 adjacent to the counter-oscillating bristles could be of a green color. It is to be understood that the above description of specific color combinations is simply for exemplary purposes and any combination of colors including only one color could be used.

Preferably, fixed section 38 is of a saddle type construction to snap onto the head 14 in any suitable man-

IR-6882 (144\*201)

ner. As a result, it is possible to replace one fixed section having one type of bristles with another fixed section having different types of bristles.

Preferably, the invention is practiced where the third section 38 is a fixed section either having fixed bristles or bristles which can move independently of each other by being mounted on an elastomeric base. The invention, however, may also be practiced where the third section 38 is also movable. For example, the third section 38 may move in and out in a direction generally perpendicular to the outer surface 26 of head 14. This would result in a vibrating section. Any suitable drive mechanism may be used to accomplish this in and out vibrating motion such as the type of drive section described in U.S. Patent No. Re.35,941, all of the details of which are incorporated herein by reference thereto. Alternatively the vibrating section could be free floating without a positive drive. The resulting in and out motion is indicated by the arrow 42 in Figure 3. Other forms of movement of third section 38 could be as indicated by the arrow 44 in Figure 2 where the movement is longitudinal with respect to the longitudinal axis of head 14 or could be lateral as indicated by the arrow 46 of Figure 2. Any suitable drive mechanism may be used to accomplish these motions which would be in a plane generally parallel to the outer surface 26 of head 14. Reference is made to copending appli-

IR-6882 (144\*201)

10/066,459, filed January 31, 2002 all of the details of which are incorporated herein by reference thereto.

As is apparent the invention thereby includes a first tuft block and a second tuft block which are mounted for counter-oscillation with respect to each other in a plane generally parallel to the outer surface of the head. In addition, the head of the toothbrush includes a third tuft block. The third tuft block may be a fixed section having fixed bristles or bristles independently movable by being mounted on an elastomeric base. Alternatively, the third tuft block may also move either laterally, transversely or in and out. The bristles on the various tuft blocks may be of any of the constructions previously described and may be of various lengths, colors and stiffness and may be mounted perpendicularly to or at an angle to the outer surface of the head.



IR-6882 (144\*201)

IN THE CLAIMS:

1. A powered toothbrush comprising a handle with a neck, a head mounted to said neck, said head having an exposed outer surface, a first tuft block mounted to said head, said first tuft block having bristles extending outwardly from said outer surface, a second tuft block mounted to said head, said second tuft block having bristles extending outwardly from said outer surface, drive structure for driving each of said first tuft block and said second tuft block in counter-oscillation to each other back and forth rotationally in a plane generally parallel to said exposed outer surface, and a third tuft block having bristles extending outwardly from said exposed outer surface.
2. The toothbrush of claim 1 wherein said second tuft block is mounted within and concentric to said first tuft block.
3. The toothbrush of claim 1 wherein said bristles of said first tuft block extend outwardly from said outer surface a greater distance than said bristles of said second tuft block to create a cup-like structure.

IR-6882 (144\*201)

4. The toothbrush of claim 1 wherein said third tuft block is a fixed section.
5. The toothbrush of claim 4 wherein said bristles on said third tuft block are fixed.
6. The toothbrush of claim 4 wherein said bristles on said third tuft block are independently movable.
7. The toothbrush of claim 1 wherein said third tuft block is mounted between said neck and said first and second tuft blocks.
8. The toothbrush of claim 1 wherein said third tuft block is movably mounted on said head.
9. The toothbrush of claim 8 wherein said third tuft block is movable in a longitudinal direction in a plane generally parallel to said outer surface.
10. The toothbrush of claim 8 wherein said third tuft block is laterally movable in a plane generally parallel to said outer surface.
11. The toothbrush of claim 8 wherein said tuft block is movable in a direction generally perpendicular to said outer surface of said head.

IR-6882 (144\*201)


12. The toothbrush of claim 1 wherein said first tuft block is circular.

13. The toothbrush of claim 1 wherein said first tuft block is egg shaped.

5 14. The toothbrush of claim 1 wherein said bristles extend outwardly from said first tuft block in a generally perpendicular direction therefrom.

10 15. The toothbrush of claim 1 wherein said at least one of said bristles extend outwardly from said first tuft block at an acute angle therefrom.

15

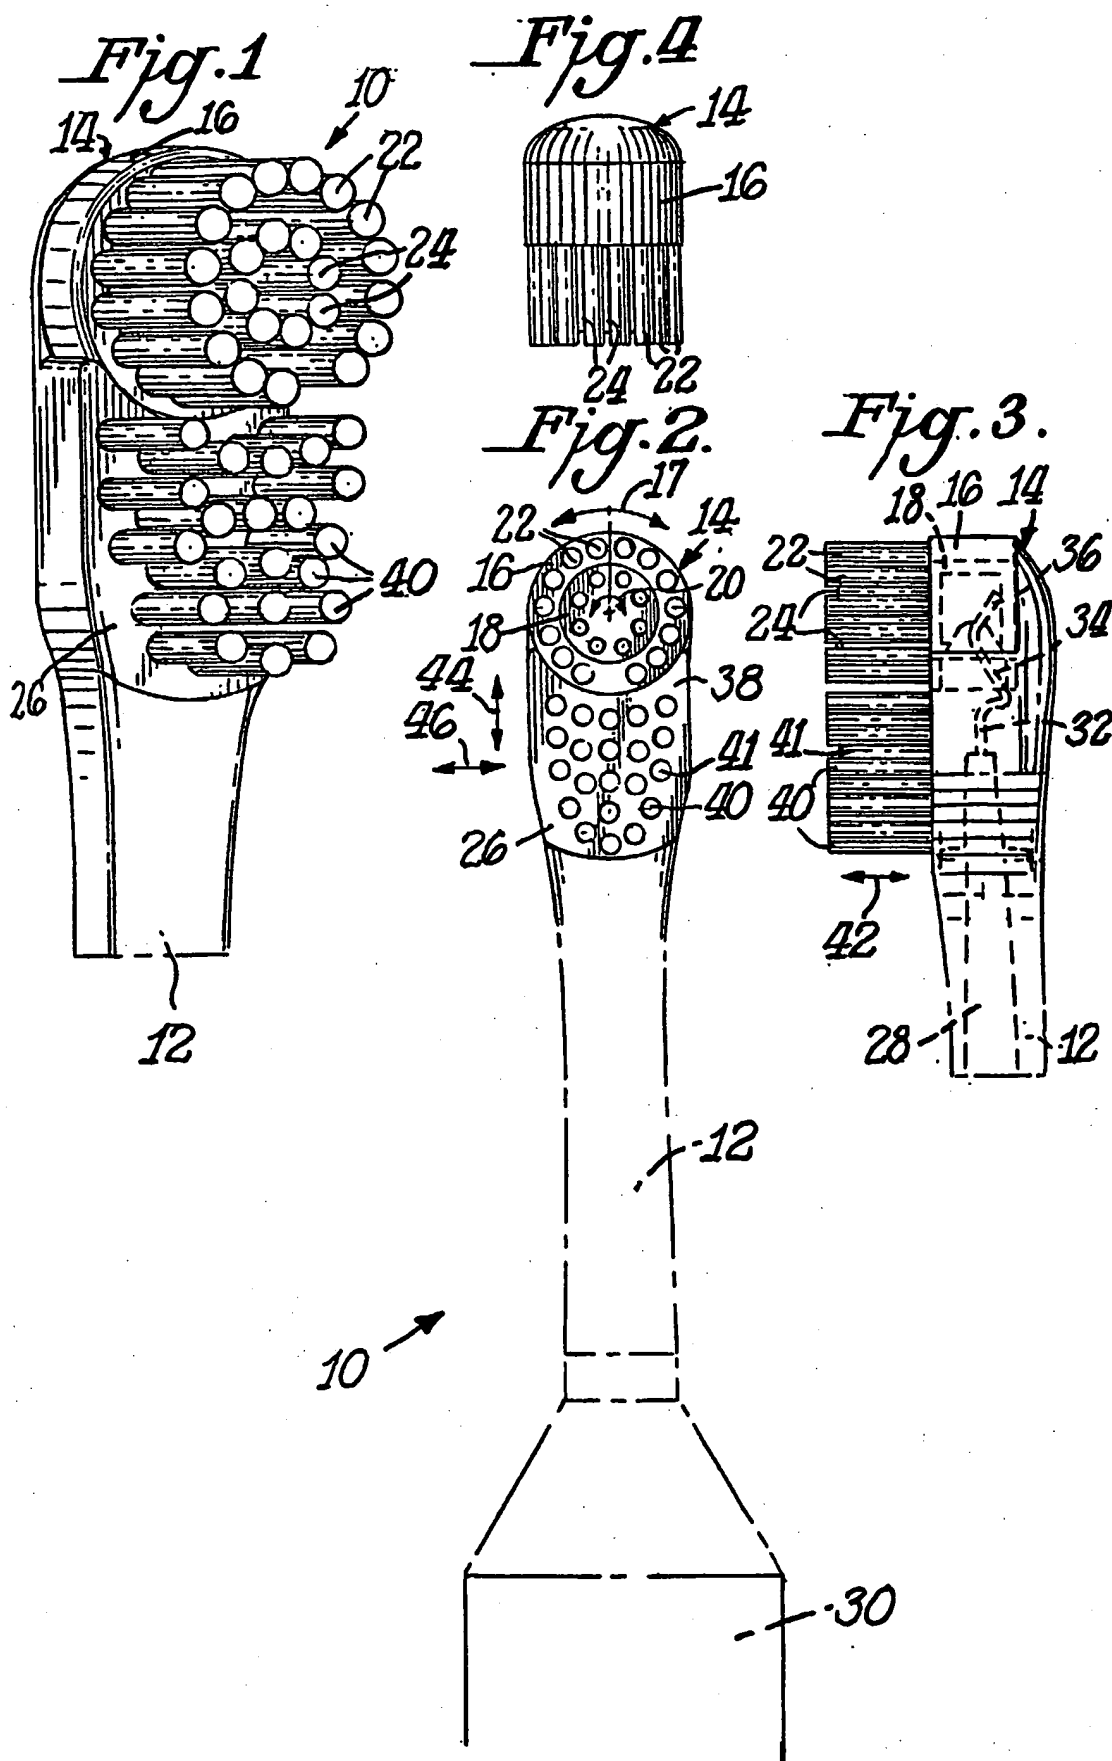

## INTERNATIONAL SEARCH REPORT

Internat. Application No  
PCT/US 03/09116

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A46B13/02 A61C17/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A46B A61C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 416 942 A (BALDACCIO LAPO ET AL) 23 May 1995 (1995-05-23) cited in the application the whole document ---	1-8, 10-12, 14,15
Y	US 5 732 433 A (DROESSLER MICHAEL ET AL) 31 March 1998 (1998-03-31)  the whole document ---	1-8, 10-12, 14,15
Y	US 5 467 495 A (BOLAND BERNHARD ET AL) 21 November 1995 (1995-11-21) the whole document ---	3
Y	WO 01 60281 A (KRAEMER HANS ; SMITHKLINE BEECHAM GMBH & CO K (DE)) 23 August 2001 (2001-08-23) the whole document ---	11
	--- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*A\* document member of the same patent family

Date of the actual completion of the international search

10 June 2003

Date of mailing of the international search report

20/06/2003

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Triantaphyllou, P

## INTERNATIONAL SEARCH REPORT

Internat      Application No  
PCT/US 03/09116

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 765 642 A (BRAUN AG) 2 April 1997 (1997-04-02) the whole document ---	15
Y	US 5 577 285 A (DROESSLER MICHAEL) 26 November 1996 (1996-11-26) the whole document ---	1,2,4,5, 7,12,14
Y	US 6 000 083 A (NOTTINGHAM JOHN R ET AL) 14 December 1999 (1999-12-14) the whole document ---	1,2,4,5, 7,12,14
Y	US 6 032 313 A (TSANG KOON KEUNG) 7 March 2000 (2000-03-07) cited in the application the whole document ---	1,2,5, 7-10,12, 14
Y	US 5 524 312 A (TAN KUO-CHING ET AL) 11 June 1996 (1996-06-11)  the whole document -----	1,2,5, 7-10,12, 14

## INTERNATIONAL SEARCH REPORT

tion on patent family members

Intern: Application No

PCT/US 03/09116

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5416942	A	23-05-1995	IT 1261901 B AU 5399194 A BR 9400611 A CA 2113005 A1 CN 1095580 A EP 0613666 A1	03-06-1996 01-09-1994 27-09-1994 27-08-1994 30-11-1994 07-09-1994
US 5732433	A	31-03-1998	DE 4309035 A1 AT 153521 T DE 59402922 D1 WO 9421191 A1 EP 0689404 A1 HK 1000346 A1 US 5850655 A	22-09-1994 15-06-1997 03-07-1997 29-09-1994 03-01-1996 06-03-1998 22-12-1998
US 5467495	A	21-11-1995	DE 4201873 C1	27-05-1993
WO 0160281	A	23-08-2001	AU 7207201 A WO 0160281 A1	27-08-2001 23-08-2001
EP 0765642	A	02-04-1997	DE 19536720 A1 AT 213397 T DE 59608753 D1 EP 0765642 A2	03-04-1997 15-03-2002 28-03-2002 02-04-1997
US 5577285	A	26-11-1996	DE 4239251 A1 AT 155665 T CN 1089821 A , B DE 59306976 D1 DK 624079 T3 WO 9412121 A1 EP 0624079 A1 ES 2105343 T3 GR 3024978 T3 HK 1001490 A1 JP 2710692 B2 JP 7505814 T	26-05-1994 15-08-1997 27-07-1994 28-08-1997 02-03-1998 09-06-1994 17-11-1994 16-10-1997 30-01-1998 19-06-1998 10-02-1998 29-06-1995
US 6000083	A	14-12-1999	AU 748925 B2 AU 4882999 A BR 9908667 A CN 1252248 A DE 29924223 U1 EP 0990424 A1 JP 2000210307 A KR 2000023525 A NZ 337972 A SG 79283 A1 TR 9902394 A2 TW 490297 B US 2002078514 A1 US 2002152564 A1 US 6189693 B1 US 6178579 B1 US 6371294 B1 US 2001004781 A1 US 2001022277 A1 US 2001054561 A1	13-06-2002 06-04-2000 10-10-2000 10-05-2000 06-06-2002 05-04-2000 02-08-2000 25-04-2000 25-05-2001 20-03-2001 21-04-2000 11-06-2002 27-06-2002 24-10-2002 20-02-2001 30-01-2001 16-04-2002 28-06-2001 20-09-2001 27-12-2001

**INTERNATIONAL SEARCH REPORT**  
 tion on patent family members

Internatl pplication No  
**PCT/US 03/09116**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6000083	A	US 2002020645 A1	21-02-2002
		US 2002017474 A1	14-02-2002
		US 2002029988 A1	14-03-2002
		US 2002032941 A1	21-03-2002
US 6032313	A 07-03-2000	CN 1150896 A	04-06-1997
		EP 0744139 A1	27-11-1996
		JP 9168496 A	30-06-1997
US 5524312	A 11-06-1996	NONE	